

A11

Much Faster, More Reliable, More Compatible



The A11 is the latest addition to Posbank's POS printer family. Designed with fast printing speed, advanced reliability and compatibility in mind for today's store environments, the Posbank A11 is the best choice you can make among the POS printers in its class. Its printing speed of 250mm/s makes it deal for crowded checkout areas and advanced reliability for large volume printing in retail and hospitality segments. For enhanced customer experiences, the A11 is compatible with leading mobile operating systems including Android and iOS. The industry-leading three-year limited warranty ensures lower total cost of ownership.

Industry : Retail, Hospitality

Application : Receipt, Kitchen, Ticket, Barcode,
 Coupon, Kiosk, Queue Management



- 2" or 3" direct thermal POS printer
- Fast printing speed of 250mm/s
- Clear and crisp text and graphic with 180 dpi
- Advanced reliability for long-lasting and large volume printing
 (Autocutter 1.5 million, MCBF 60million, TPH 150km)
- USB+Serial, WiFi, Bluetooth, Ethernet interfaces
- mPOS friendly. Compatible with Android and iOS (SDK)
- Easy paper loading
- Countertop or wall-mount deployment
- Lower power consumption. ENERGY STAR®qualified
- Three-year limited warranty
 (Two-year for printhead and cutter)

Specification


Model : Prime

Print	
Print Method	Direct Thermal
Print Speed	250mm/s
Print Resolution	180 dpi (7dots/mm)
Print Width	54mm, 74mm
Print Font	
Character Size	Font A 12 x 24 dots, Font B 9 x 17 dots, Font C 9 x 24 dots
Character per Line	Font A 42, Font B 56, Font C 56
Character Sets	Alphanumeric : 95, Extended Graphics : 128 x 37 Page, International : 32
Barcode Types	1D : Coda Bar, Code39, Code93, Code128, EAN-8, EAN-13, ITF, UPC-A, UPC-E 2D : PDF417, QR Code
Graphics	Supporting User-defined Fonts, Graphics, Formats, and Logos
Media	
Type	Thermal Paper Roll
Paper Feed	Friction Feed
Loading	Drop in
Width	58mm, 80mm
Roll Diameter	Max. 83mm
Thickness	62~75µm
Autocutter	Full or Partial Selectable
Partition	2 inch (58mm)
Reliability	
MCBF	60million Lines
TPH	150km
Auto Cutter	1.5million Cuts
General	
Interface	Built-in USB + Serial (RJ-45), WiFi, Bluetooth, Ethernet (Optional, Gender Type)
Support Mobile Operating Systems	Android, iOS (SDK)
NV Image Memory	256kb
Receive Buffer	4kb
Printer Driver	Windows Driver, OPOS Driver, JPOS Driver, Linux CUPS Driver, Mac Driver, Virtual COM USB/Ethernet Driver, Utility Program
Utility	Unified POS Utility (VMSSM, NV)
Sensors	Paper End, Cover Open, Black Mark, Partition
Drawer	2 port (via y-type adaptor)
Power Supply	24V, 2.5A
Temperature & Humidity	Operating : 0 ~ 45°C, 10 ~ 80% RH (No condensations) Storage : -20 ~ 60°C, 10 ~ 90% RH (No condensations)
Safety Standards	CE, FCC
Dimensions	(W)145mm x (D)195mm x (H)146mm
Weight	1,600g
Color	Black
Options	Ethernet, Bluetooth, WiFi (Interface Card Type)
Eco	WEEE, RoHS, Reach SVHC, Energy Star
Warranty	3 Years (TPH, Cutter 2 Years)
What's in the Box	A11, Power Supply (Adapter, Power Cord), USB + Serial Cable, Paper Roll (30Ø), Partition, Installation CD, Installation Guide

Specifications may change without prior notice.

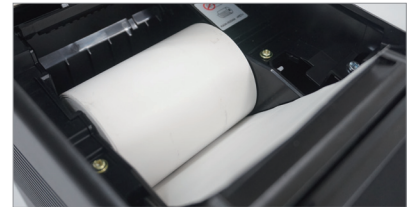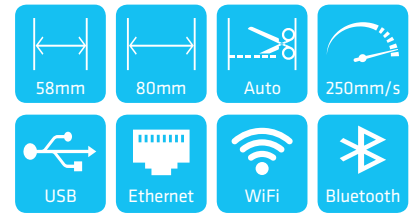

• 3" Paper Roll

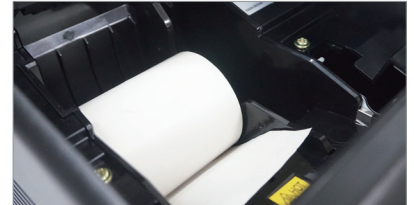

• 2" Paper Roll with Partition



• Interface. Ethernet



• Wall-mount Deployment

Dimension



POSBANK®

Headquarters

#805~808, 108, Gasan digital 2-ro,
Geumcheon-gu, Seoul, 08506, South Korea
Tel : +82-2-2626-9118
Fax : +82-2-2626-9119
e-mail : sales@posbank.com
www.posbank.com

US

California : 1230 East 223rd Street, Suite #204 Carson, CA 90745
New York : 75 Fairchild Ave. Plainview New York 11803
Tel : +1-888-998-1767 ext. 103~104
Fax : +1-310-513-1362
e-mail : sales@posbankusa.com
www.posbankusa.com

Europe

Via Piersanti Mattarella, 32, 30030,
Gardignano, Venezia, Italy
Tel : +39-041-583-0594
Fax : +39-041-583-0595
e-mail : sales@posbank.eu
www.posbank.eu

Copyright © 2016 Posbank Co.,Ltd.

Posbank and the Posbank logo are trademarks of Posbank in the United States and other countries. All trademarks are the property of their respective owners. Posbank shall not be liable for technical or editorial errors or omission contained herein. The information in this publication are informational purposes only and may be altered or amended by Posbank. All statements regarding Posbank's direction and intent are subject to change or withdraw without notice. Specifications may change without prior notice.

POSBANK-POS-PRINTER-A11PRIME-DATASHEET-EN1604001